

HIGHTEC RACING GEAR OIL SAE 75W-90

Fully synthetic, high-performance racing gearbox oil of viscosity grade SAE 75W-90 for use in manual gearboxes and axle gears running at maximum loads during racing.

Description

HIGHTEC RACING GEAR OIL SAE 75W-90 is a high-performance gearbox oil of SAE grade 75W-90. It is based on fully synthetic poly-alpha-olefins (PAO) and esters, developed specifically and tested for and in vehicles used for racing. Its exceptionally high level of performance is achieved through the interaction of these fully synthetic base oils with their naturally high viscosity index (VI) and the advanced additives.

Application

HIGHTEC RACING GEAR OIL SAE 75W-90 provides a stable lubricating film for safe wear protection and the highest reliability, even under maximum load. In so doing, it outperforms the API GL5 wear protection requirements. HIGHTEC RACING GEAR OIL SAE 75W-90 has provided an impressive demonstration of its performance capacity as part of the VLN endurance championship and the 24h race at the Nürburgring and is suitable for use in axle gears and manual gearboxes, irrespective of whether classical H or sequential shifting systems are used.

Benefits

- Tried and tested, high-performance gearbox oil for safe wear protection and the highest reliability during racing
- Excellent resistance to thermal and mechanical loads
- Extremely stable to shear stress - 'Stay-in-grade'
- The fully synthetic PAO and ester base oils and the most advanced additives provide the highest oxidation stability and wear protection
- Stable lubricating film, even with very hot oil and under very high loads. As a result, reduced wear and maximum reliability
- The favourable cold viscosity ensures improved shifting ability and fast lubrication
- Miscible and compatible with conventional and synthetic gearbox oils. However, in order to exploit the full product benefits of HIGHTEC RACING GEAR OIL SAE 75W-90, a complete gearbox oil change is recommended.

Notices

HIGHTEC RACING GEAR OIL SAE 75W-90 is not suitable for use in 'stepped' automatic transmissions, in DCT/DSG transmissions (with dual-clutch running in oil bath) or CVT (continuously variable or 'non-stepped' automatic) transmissions. HIGHTEC RACING GEAR OIL SAE 75W-90 is not suitable for use in locking differentials that require an oil with a LS differential additive (Limited Slip). HIGHTEC RACING GEAR OIL SAE 75W-90 has been developed specifically for use under extreme racing conditions. In so doing, particular attention was paid to maximum wear protection and reliability. The general suitability for daily use was, however, neglected as a result. We therefore recommend the use of this oil in competitive environments only, rather than for day-to-day operations.


Typical characteristics

Property	Method	Unit	Value
Density at 15 °C	ASTM D-7042	g/ml	0,871
Kinematic viscosity KV 40	ASTM D-7042	mm ² /s	104,9
Kinematic viscosity KV 100	ASTM D-7042	mm ² /s	18,0
Viscosity index	ASTM D-7042	-	191
Flash point	ASTM D-92 / DIN EN ISO 2592	°C	218
Pour point	ASTM D-97 / DIN EN ISO 3016	°C	-41

The characteristics shown are typical of current production. This data cannot be constructed as a legally binding warranty or guaranty of certain product properties or of the suitability of the product for a specific application. ROWE products are continually improved. Therefore ROWE reserves the right to change all the technical data in this product information at any time without notice. All sales and deliveries shall be subject to our current General Terms and Conditions of Sale and Terms (www.rowe.com.de).




25054 | 12.12.2018



HIGHTEC RACING GEAR OIL SAE 75W-90

Iron wear comparison

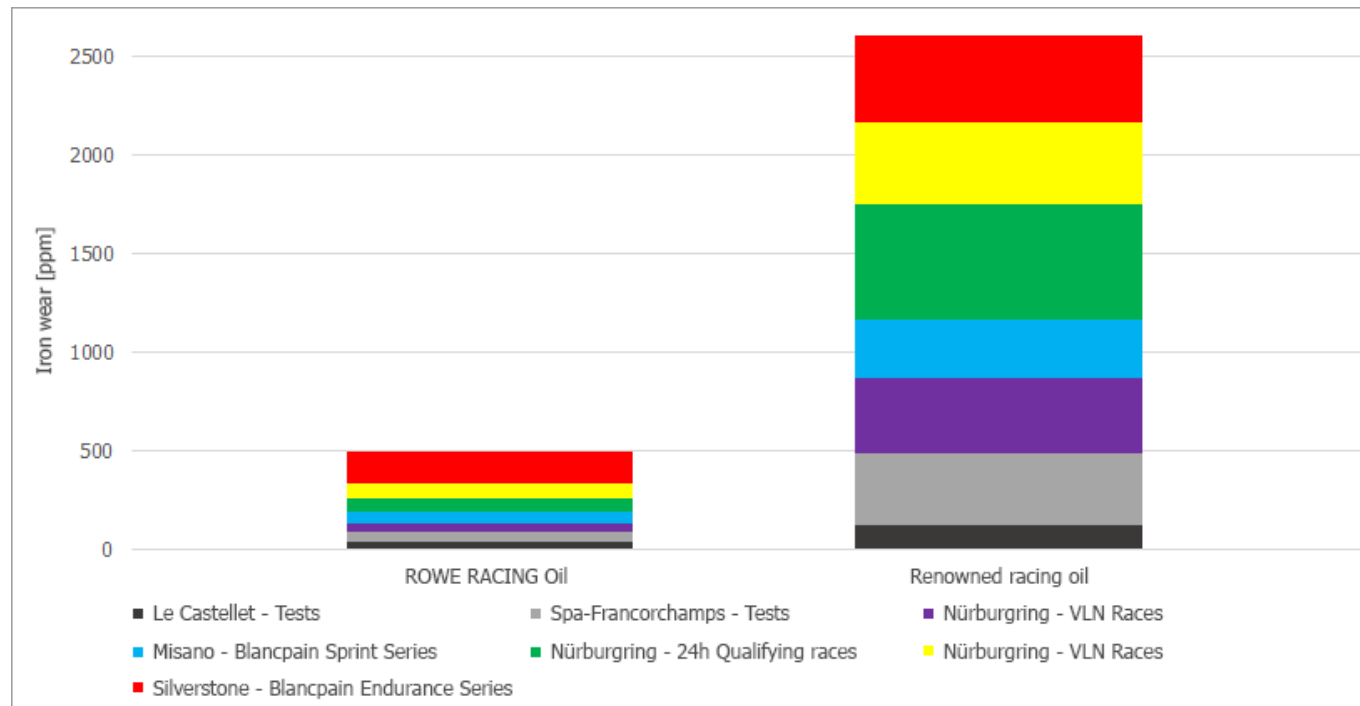

The diagram (above) shows the iron wear accumulated over several races/test drives. The iron already shows more wear with the renowned racing oil after the third run (right) than it does with the ROWE RACING oil (left) after all 7 races / test drives together.



25054 | 12.12.2018

Are you looking for the correct oil for your vehicle? Scan this code for the ROWE-oilfinder.

